



COMPANY PROFILE

1ST EDITION
2021

"Quality Express Commitment"

Supplier for Triangle and Aelous Tires

Lubricants and grease

Different Tubes

Hydraulic oils

Engine oils

Battery

TABLE OF CONTENT



ABOUT US	2
OUR VISION	2
OUR MISSION	2
OUR CORE VALUES	3
BUSINESS ACTIVITIES	4-14
Supplier for Triangle and Aelous Tires	
Lubricants and grease	
Different Tubes	
Hydraulic oils	
Engine oils	
Battery	
SUSTAINABILITY	15
OUR COMPANY STRUCTURE	16
OUR CLIENTELE	17

CONTACTS INFO

Office Line: +251 111 718 080
Fax Line: +251 111 718 100
Mobile: +251 909 000 777
 +251 911 236 410
Email: yabserajuba@gmail.com
 ephrem2121@yahoo.com
Website: www.yabseragroups.com
Address: Piassa Harron Tower 703,
 P.O.Box 28902,
 Addis Ababa.



ABOUT US

Yabsera Trading Limited is one of the sister company of Yabsera Groups Co. Ltd that does business in different countries of East Africa. Delivering Unmatched Services, We are Suppliers for Triangle and Aelous Tires, Lubricants and grease, Different Tubes, Hydraulic oils, Engine oils & Battery

Yabsera was established in Nov 2012. During a few years, they managed to turn their business, originally a small company having only twenty five (25) employees, with offices in Ethiopia, South Sudan and Uganda.

YTL aspires to be a comprehensive provider of services for clients in multiple areas, with the guarantee of excellent quality and unsurpassed professionalism. Our extensive in-house resources and knowledge base will be tailored to the unique needs of each client and the specific requirements of each project.

Our Mission | Vision Statement

Mission

To create and build an environment of a strong international group.

To strive to be a strong and reliable partner in all areas of our business activities.

Vision

To keep developing and using cutting edge technologies and work procedures.



Integrity, Honesty & Quality are at the heart of our business.

We Expect employees to maintain high ethical standards in everything they do.

Business Activities

Supplier for Triangle and

Aelous Tires

Lubricants and grease

Different Tubes

Hydraulic oils

Engine oils

Battery

TRIANGLE AND AELOUS TIRES

We Provide a WIDE RANGE OF HIGH VALUE PRODUCTS


YTL is constantly on the look-out for solutions that meet the new mobility needs of consumers. This is reflected in the ongoing expansion of its product portfolio and the development of new applications and customised solutions.

For car tyres, YTL offers state-of-the-art technological solutions such as its Specialties:

PASSENGER TIRES
SPORTS TIRES
HIGHWAY SUV TIRES
OFF-ROAD 4X4 TIRES
TRUCK TIRES
LIGHT COMMERCIAL TIRES

How to identify Your Tire

What the Numbers Mean

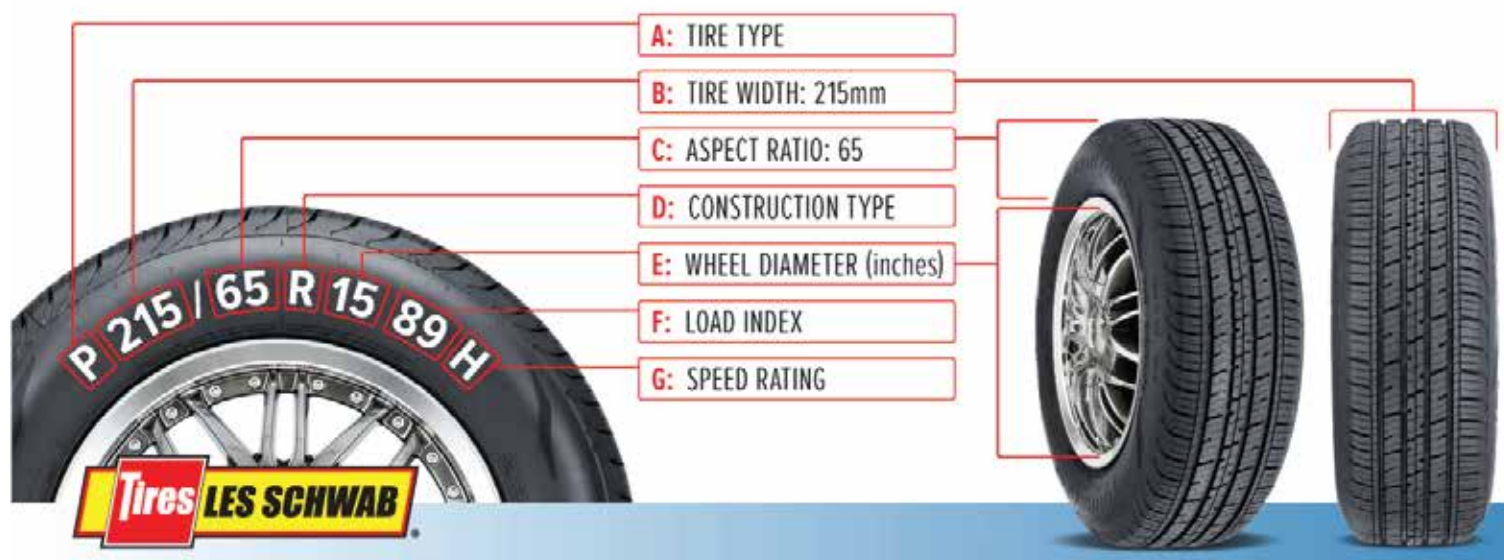

Tire size can be confusing. Some numbers on the sidewall are listed in millimeters while others are inches. Plus, the right size for your car, truck, or trailer can differ depending on where and how you drive.

You can see your original equipment tire size in your owner's manual or on the placard generally located on the driver's side door jam. This is the sizing recommended by the vehicle manufacturer.

If you're interested in switching out your tires for a different look or performance, a good place to start is the numbers and other indicators on your existing tires' sidewall. Next, have a tire professional help you determine a tire size range that will fit your vehicle and driving needs.

RADIAL CONSTRUCTION



BIAS CONSTRUCTION



Tire Size Charts

Below you will find several charts that will help you understand tire sizing numbers, including a load index chart and speed rating chart.

LOAD INDEX

LOAD INDEX	LOAD (lbs)	LOAD INDEX	LOAD (lbs)	LOAD INDEX	LOAD (lbs)
65	639	94	1477	123	3417
66	661	95	1521	124	3527
67	677	96	1565	125	3638
68	694	97	1609	126	3748
69	716	98	1653	127	3858
70	739	99	1709	128	3968
71	761	100	1764	129	4079
72	783	101	1819	130	4189
73	805	102	1874	131	4299
74	827	103	1929	132	4409
75	853	104	1984	133	4541
76	882	105	2039	134	4674
77	908	106	2094	135	4806
78	937	107	2149	136	4938
79	963	108	2205	137	5071
80	992	109	2271	138	5203
81	1019	110	2337	139	5357
82	1047	111	2403	140	5512
83	1074	112	2469	141	5677
84	1102	113	2535	142	5842
85	1135	114	2601	143	6008
86	1168	115	2679	144	6173
87	1201	116	2756	145	6393
88	1235	117	2833	146	6614
89	1279	118	2910	147	6779
90	1323	119	2998	148	6944
91	1356	120	3086	149	7165
92	1389	121	3197	150	7385
93	1433	122	3307		

SPEED RATING

SPEED SYMBOL	SPEED (mph)
A1	3
A2	6
A3	9
A4	12
A5	16
A6	19
A7	22
A8	25
B	31
C	37
D	40
E	43
F	50
G	56
J	62
K	68
L	75
M	81
N	87
P	93
Q	99
R	106
S	112
T	118
U	124
H	130
V	149
W	168
Y	186
(Y)	Above 186

*For tires having a maximum speed capability above 149 mph, a ZR may appear in the size designation... above 186 mph, a ZR must

PASSENGER TIRES | LIGHT VEHICLES | SPORT TIRES

YTL offers drivers the most durable, high-performing tires no matter what vehicle you drive. Whether you are looking for tyres for comfort, sports performance, off road, heavy industrial vehicles or commercial vehicles, you'll always find a great option in our range.



If you want premium tyre technology, choose the YTL Excellence. This premium tyre is for a luxurious ride.

CONSTRUCTION & TRANSPORT TIRES



TR691JS

100%
SATISFACTION
GUARANTEE

Premium Deep Tread Mixed Service Drive Tire

- Deeper tread depth for long tread life in tough on/off road applications
- Aggressive tread design offers excellent traction for severe off-highway conditions
- Special chip, cut and abrasion resistant compounds promote long tread life
- Enhanced casing package helps improve toughness and retreadability

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH [32NDS]	SECTION WIDTH [IN]	OVERALL DIAMETER [IN]	ALTERNATIVE RIM	SINGLE MAX LOAD [LBS]	DUAL MAX LOAD [LBS]	PRESSURE [PSI]	STATIC LOAD RADIUS [IN]	MINIMUM DUAL SPACING [IN]	TT/TL	WEIGHT (LBS)
10156911430	11.00R22.5	16	146/143	K	32	11	41.5	7.50	6610	6010	120	19.3	12.5	TT	133
10156911740	11.00R24.5	16	149/146	K	30	11	43.5	7.50	7165	6610	120	20.3	12.5	TT	139
10156911090	12.00R20	22	154/151	F	30	12.4	44.3	8.50V.9.00	9370	8540	140	20.3	14.6	TT	185



TR668

100%
SATISFACTION
GUARANTEE

Premium Mixed Service All Position Tire

- Special tread compound provides enhanced chip, chunk and cut resistance performance in tough off-road applications
- Reinforced construction and sturdy tread design improve corner stiffness for better treadwear and handling
- Tough casing package improves retreadability and stability

PRODUCT CODE	TIRE SIZE	PLY RATING	LOAD INDEX	SPEED RATING	TREAD DEPTH [32NDS]	SECTION WIDTH [IN]	OVERALL DIAMETER [IN]	ALTERNATIVE RIM	SINGLE MAX LOAD [LBS]	DUAL MAX LOAD [LBS]	PRESSURE [PSI]	STATIC LOAD RADIUS [IN]	MINIMUM DUAL SPACING [IN]
1015680900	9R22.5	14	126/124	L	18	9	28.3	7.50	4740	4470	110	18	10.3
1015680970	11R22.5	14	146/142	M	21	11	41.5	7.50	6610	6010	110	19.3	12.5
1015680250	27.5-28R22.5	14	112/108	L	22	19.7	41.1	8.25	7825	4944.5AT25R22.5	113	19.2	12.2
1015680120	31R25.5	14	148/146	M	21	11	42.5	7.50	7145.0025210001	6610	110	20.3	12.5
1015680241	31.5-38R22.5	18	154/151	M	22	12.3	42.4	9.75	8270	7620	120	19.7	12.8
1015680270	31.5-38R22.5	22	157/154	L	22	12.3	42.4	9.75	8920	8270	140	19.7	12.8
1015680210	27.5-28R22.5	18	148/142	L	24	12.9	37.7	9.00	8940	8495	125	20.3	12.5



Rigid Dump Truck – Radial



Tire Size Designation	Pattern	Star Rating	Ind Code	Rim Width & Flange	Min. Dual Spacing		Approximate Inflated Dimensions				Loaded Dimensions		Tread Depth		Performance Capability (TKPH)			Type	
							Overall Width		Overall Diameter		Static Load Rad								
					in	mm	in	mm	in	mm	in	mm	32nds	mm	T1	T2	T3	TT	TL
13.00R25(10.00 Bead)	TL569	***	E-3	10.00/2.0 8.50/2.0	16.7	424	13.8	350	51.2	1300			31.5	25.0					TT
13.00R25(8.50 Bead)	TL569	***	E-3	10.00/1.5 8.50/1.3	16.7	424	13.8	350	51.2	1300			31.5	25.0					TT
14.00R24	TB516S	*	E-4	10.00W	17.7	450	14.8	375	55.8	1418			45.4	36.0					TL
	TB516S	**	E-4	10.00W	17.7	450	14.8	375	55.8	1418			45.4	36.0					TL
	TB516S	***	E-4	10.00W	17.7	450	14.8	375	55.8	1418			45.4	36.0	85	105	130		TL
14.00R25	TL569	***RF	E-3	10.00/2.0	17.7	450	14.8	375	53.9	1368	24.7	628	32.8	26.0					TT
	TB526	***RF	E-3	10.00/2.0	17.7	450	14.8	375	53.9	1368	24.4	621	32.8	26.0	85	105	130		TT
	TB526	***RF	E-3	10.00/2.0	17.7	450	14.8	375	53.9	1368	24.4	621	32.8	26.0	85	105	130		TL
	TB516S	*	E-4	10.00/1.5	17.7	450	14.8	375	55.8	1418			45.4	36.0					TL
	TB516S	**	E-4	10.00/1.5	17.7	450	14.8	375	55.8	1418			45.4	36.0					TL
	TB516S	***	E-4	10.00/1.5	17.7	450	14.8	375	55.8	1418			45.4	36.0	85	105	130		TL
18.00R25	TB516S	**	E-4	13.00/2.5	23.1	587	19.6	498	65.9	1673	29.4	748	56.7	45.0	150	190	240		TL
	TB516S	***	E-4	13.00/2.5	23.1	587	19.6	498	65.9	1673	29.4	748	56.7	45.0					TL



Rigid Dump Truck – Radial



Tire Size Designation	Pattern	Star Rating	Ind Code	Rim Width & Flange	Min. Dual Spacing		Approximate Inflated Dimensions				Loaded Dimensions		Tread Depth		Performance Capability (TKPH)			Type	
							Overall Width		Overall Diameter		Static Load Rad								
					in	mm	in	mm	in	mm	in	mm	32nds	mm	T1	T2	T3	TT	TL
18.00R33	TB566S	**	E-4	13.00/2.5	23.1	587	19.6	498	73.9	1877	34.1	865	66.8	53.0					TL
	TB526S	**	E-4	13.00/2.5	23.1	587	19.6	498	73.9	1877	33.1	841	64.3	51.0	160	190	270		TL
21.00R33	TB526S	**	E-4	15.00/3.0	27.6	701	22.5	571	78.8	2001	36.0	914	65.5	52.0	190	230	300		TL
21.00R35	TB526S	**	E-4	15.00/3.0	27.6	701	22.5	572	80.8	2052			75.6	60.0	230	280	365		TL
24.00R35	TB526S	**	E-4	17.00/3.5	31.3	795	25.7	653	85.8	2175			81.9	65.0	280	350	390		TL

Note: Several types of tread compounds. Type T1: Low speed, highly resistance to abrasion and cutting. Type T2: A compromise between resistance to abrasion and cutting. Type T3: Engineered to cope with high speed travel on long hauls. For which tread compound to use, the customer can contact the Radial OTR technical department of Triangle Group.

AUTOMOBILE TUBES



We offer a wide range of precision tubes for the automotive industry within the following parameters:

Dimensions of precision tubes for the car industry

OUTER DIAMETER (OD) 4.0 - 125.0 mm (1/4 - 4 3/4)

WALL THICKNESS (WT) 0.5 - 13.0 mm (0,020 - 0,454)

Tubes for various car components are delivered according to

EN 10305-1;

DIN 2391; BS 6323/4;

NF A 49-310, 49-312; UNI 7945;

See tube sizes acc. to European standards.

AUTOMOBILE LUBRICANTS



HYDRAULIC



BENEFITS

- Superior hydrolytic stability
- Outstanding thermal and oxidation stability
- Good demulsibility and anti-foam properties
- Excellent EP performance
- Excellent rust protection
- Lower tendency to block filters
- Reduced pump wear

Automobile Batteries




BATTERY SIZE CHART

BATTERY GROUP SIZE	INCHES			MILLIMETERS		
	L	W	H	L	W	H
24	10 1/4	6 13/16	8 7/8	260	173	225
24F	10 3/4	6 13/16	9	273	173	229
27	12 1/16	6 13/16	8 7/8	306	173	225
34	10 1/4	6 13/16	7 7/8	260	173	200
35	9 1/16	6 7/8	8 7/8	230	175	225
H6 (48)	12 1/16	6 7/8	7 9/16	306	175	192
H8 (49)	15	6 7/8	7 3/16	381	190	192
65	12 1/16	7 1/2	7 9/16	306	190	192
78	10 1/4	7 1/16	7 11/16	260	179	196




Sustainable Community Development

Environment: YTL continuously seeks sustainable ways of facilitating the production, provision, and promotion of alternative sources of energy. We visualize investing in protecting the environment and welfare of our people. We abide by the highest standards of globally established charters for environmental protection, while also promoting awareness campaigns and partnerships committed to safeguarding the environment. Our interventions include promoting the use of renewable energy and creating awareness around the

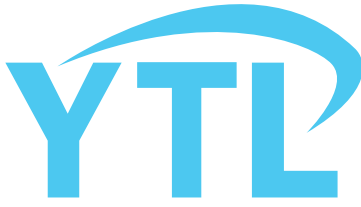

YABSERA TRADING LIMITED

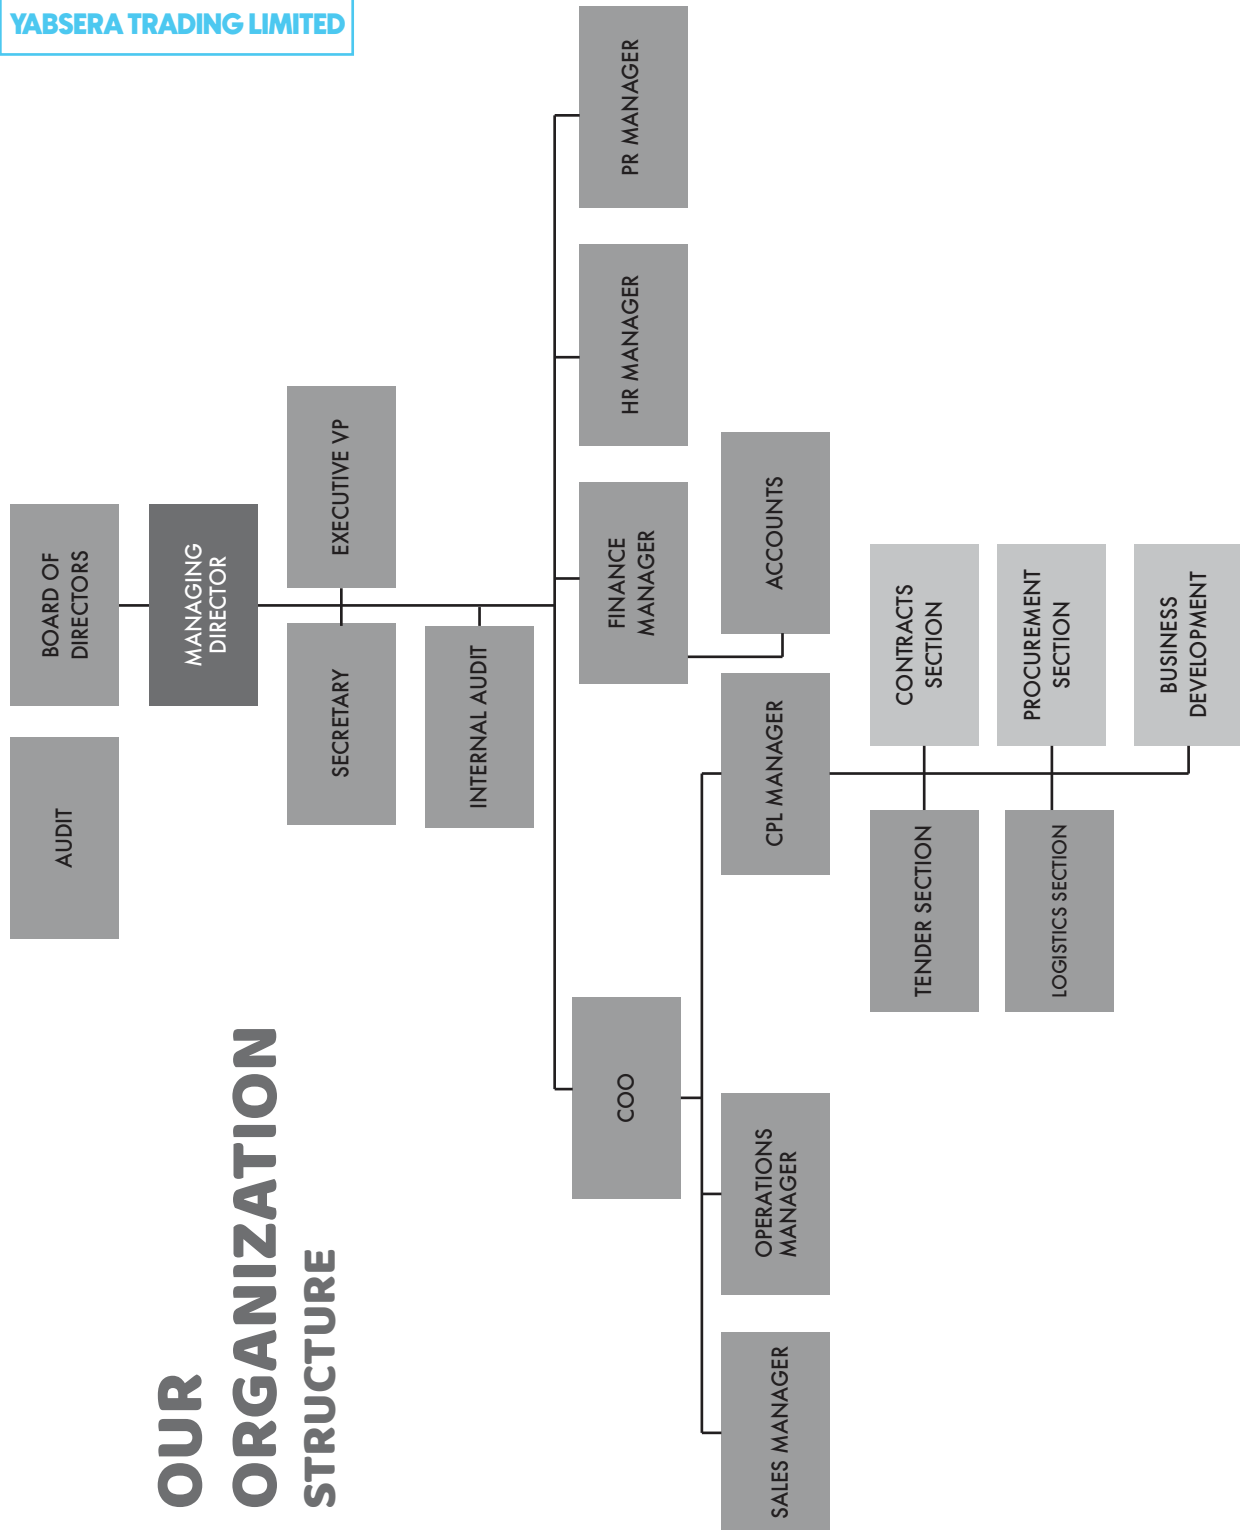



SOME OF OUR CLIENTELE





CONTACT US



Office Line: +251 111 718 080
Fax Line: +251 111 718 100
Mobile: +251 909 000 777
+251 911 236 410



yabserajuba@gmail.com
ephrem2121@yahoo.com



www.yabseragroups.com



**Piassa Harron Tower 703,
P.O.Box 28902,
Addis Ababa.**

"Quality Express Commitment"